


Product Features

- 8 Channel AHD/ TVI / CVI / ANALOG / IP 5 IN 1 5MP High Definition Hybrid DVR
- Display / Recording Frame Rate - Analog :5MP@10fps, 4MP@15fps, 1080P / 720P/960H@25fps
IP :4MP/3MP1080P/720P/960H @25fps
- 8 Channel AHD+TVI+CVI+ANALOG + IP(4CH) video input
- Adopt standard H.264 high profile compression format to get high-quality video at much lower bit rate
- Support 8 Video BNC & 4 Audio Input / 1 HDMI, 1 VGA output
- Support 1 SATA HDDs up to 6TB, W/O Alarm in & Alarm out

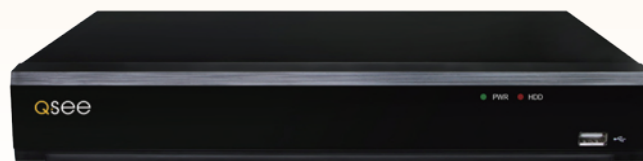

8 Channel High Definition 5MP 5 IN 1 Hybrid DVR

QS5108

Technical Specifications:

Model	QS5108
Video Compression	H.264
Video System	NTSC/PAL
Operation System	Linux(embedded)
Analog video-input /output	8CH inputs / VGA and HDMI output
IP Video Input	4ch,(only IP up to 12ch)
Composite Video Input	up to 12ch (Analog video + IP video)
Audio input /output	4CH inputs /1CH output(RCA)
Display	
Resolution	Analog :5MP (20fps) 4MP/3MP(30fps) 1080P/720P/960H IP :4MP/3MP1080P/720P
Feature	1/4/6/8/9/10/13/14/16/S.E.Q.
Record	
Resolution	Analog :5MP/4MP/3MP/1080P/720P/960H IP :4MP/3MP1080P/720P
Speed	Analog :5MP:10fps(each ch) 4MP:15fps(each ch) 3MP:20fps(each ch) 1080P:PAL:25fps(each ch)/NTSC:30fps(each ch) 720P:PAL:25fps(each ch)/NTSC:30fps(each ch) 960H:PAL:25fps(each ch)/NTSC:30ps(each ch) IP : PAL:25fps(each ch)/NTSC: 30fps(each ch)

IP-Recording Bandwidth (Maximum input Bandwidth)	32Mbps ~96Mbps(default is 32Mbps, decrease one Analog channel can increase 8Mbps)
Maximum output Brandwidth	96Mbps
Maximum decode performance	5MP: 96fps 4MP: 120fps 1080P: 240fps
Recording Mode	Continuous/Manual/Motion detect
Synchronous Playback	8CH
Network Type	Lan, DHCP, and DDNS
HDD interface	1SATA HDD, up to 6TB
Multiplex Operation	live display, record, playback, backup and network
USB	1xUSB3.0 1*USB2.0(for mouse and backup/upgrade)
Sensor & Alarm I/O	no
PTZ Control	yes (RS485)
Mobile Surveillance	Support Mobile Phones based on iPhone and Android operation system
VGA/HDMI	1280*1024, 1440*900, 1280*720, 1920*1080 , 1680*1050, 1600*1200, 1920*1200, 2560*1440 , 3840*2160
	DC 12V/2A
Dimension(WxDxH)	300X227X53mm
Working Temperature	-10°C~+55°C
Working Humidity	10%~90%