




QTP3116A

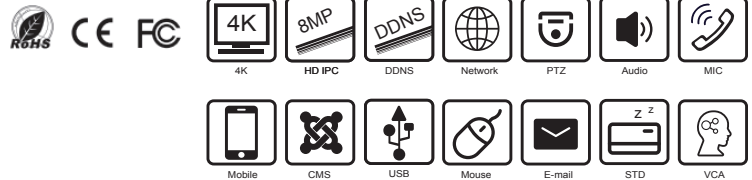

SPECIFICATION

Video Compression		H.265/H.264
Video System		NTSC/PAL
Operation System		Linux(embedded)
Analog video-input / output		16CH inputs / VGA and HDMI output
IP Video Input		8ch,(only IP up to 24ch)
Composite Video Input		up to 24ch (Analog video + IP video)
Audio input /output		16CH inputs /1CH output(RCA)
Display (Resolution)		Analog : 5MP-Lite:20fps 4MP-Lite:30 fps 3MP:18fps 1080P/720P/960H:30fps IP : 5MP/4MP/3MP1080P/720P
Record	Resolution	Analog : 5MP-Lite/4MP-Lite/3MP/1080P/720P/960H IP : 5MP/4MP/3MP1080P/720P
	Speed	Analog : 5MP-Lite:15fps (each ch) 4MP-Lite:18fps(each ch)- 3MP:10fps(each ch) 1080P:15fps(each ch) 720P:PAL:25fps(eachch)/NTSC::30fps(each ch) IP : PAL:25fps(each ch)/NTSC: 30fps(each ch)
IP-Recording Bandwidth (Maximum input Bandwidth)		32Mbps ~96Mbps(default is 32Mbps, decrease one Analog channel can increase 4Mbps)
Maximum output Brandwidth		64Mbps
Maximum decode performance		1080P:240fps
Recording Mode		Continuous/Manual/Motion detect
Synchronous Playback		16CH
Network Type		Lan, DHCP, and DDNS

HDD interface	2SATA HDDs, up to 16TB
Multiplex Operation	live display, record, playback, backup and network
USB	2xUSB(for mouse and backup/upgrade)
Sensor & Alarm I/O	No
PTZ Control	Yes (RS485)
Mobile Surveillance	Support Mobile Phones based on iPhone and Android operation system
VGA/HDMI	1024*768,1280*720,1280*1024,1440*900,1920*1080(1080P), 2560*1440(2K),3840*2160(4K)
Power Supply	DC 12V/5A
Dimension(WxDxH)	378x340x50mm
Working Temperature	-10°C~+55°C
Working Humidity	10%~90%

Rear Panels

