


Product Features

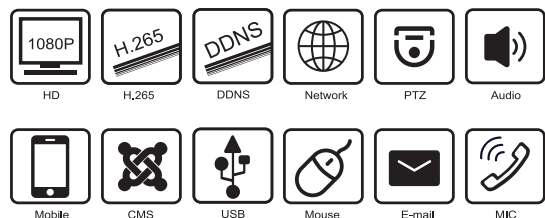

- ▲ 4/ 8/ 16 CH TVI/ AHD video input, support 5MP/ 4MP/ 3MP/1080P/720P/WD1
- ▲ 4 / 8 / 16 CH CVI video input, support 4MP/ 3MP/1080P/720P/WD1
- ▲ 4 / 8 / 16 CH DVRs default support /4 / 8 CH IPC 5MP/4MP / 3MP / 1080P / 960P / 720P
- ▲ Adopt standard H.265 high profile compression format to get high-quality video at much lower bit rate
- ▲ Intuitive and user-friendly Graphics User Interface (GUI),window style operation by mouse
- ▲ Multi-mode recording: manual / timer / motion
- ▲ Playback : 4 / 8 / 16 CH simultaneously playback
- ▲ Search: time slice, time, event (manual, motion), tag search
- ▲ Express and flexible backup via USB, network and so on
- ▲ Pentaplex: preview, record, playback, backup and remote access
- ▲ DHCP, DDNS, PPPoE network protocol, IE browse and CMS supported
- ▲ Remote control via IE or CMS : preview, playback, backup, PTZ and configuration

- ▲ Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- ▲ Multi-user online simultaneously
- ▲ Authorization management, log review and device status review
- ▲ Support 1080P output, true high resolution display
- ▲ Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- ▲ Support NAT function and QRCode scanning by mobile phone and PAD
- ▲ Powerful smart phone & Pad surveillance with iOS and Andriod OS


SPECIFICATION

MODEL		QTH94-B	QTH98-B	QTH916-B
SPECIFICATION				
System	Compression	Standard H.265 High Profile		
	CPU	Cortex A9		
	OS	Embedded Linux		
Video	Input	BNC × 4	BNC × 8	BNC × 16
	Resolution	TVI/AHD : 5MP/4MP/3MP/1080P/720P/WD1 CVI : 4MP/3MP/1080P/720P/WD1		
	Output	HDMI × 1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA × 1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768 BNC × 1 : CVBS (used as the main or spot output)		
	IP Input	2CH (Up to 6CH)	4CH (Up to 12CH)	8CH (Up to 24CH)
Audio	Input	RCA × 1		
	Output	RCA × 1		
	Two-way audio	Take up channel one audio input		
Record	Frame Rate	5MP Lite :10fps 4MP Lite : 12fps (PAL)/15fps (NTSC) 1080P : 12fps (PAL)/15fps (NTSC) 1080P Lite/720P/WD1 : 25fps (PAL)/30fps (NTSC)		
	Resolution	5MP Lite/4MP Lite/1080P/1080P Lite/720P/WD1		
	Bit Rate	32Kbps ~ 4Mbps	32Kbps ~ 4Mbps	32Kbps ~ 5Mbps
	Mode	Manual, timer, motion		
IP Input	Resolution	Up to 5MP@25fps	Up to 5MP@30fps	Up to 5MP@30fps
Playback	Playback	4 CH	8 CH	16 CH
	Search	Time slice / time / event / tag search		
	Smart Search	Highlight colors to display the camera record in a certain period of time, different colors refer to different record events		
	Function	Play, pause, FF, FB, digital zoom, etc.		


SPECIFICATION \ MODEL		QTH94-B	QTH98-B	QTH916-B
Alarm	Mode	Manual, motion, exception		
	Input	No		
	Output	No		
	Triggering	Record, snap, preset, e-mail, etc.		
Network	Interface	RJ 45 100Mbps × 1		
	Protocol	TCP/ IP,PPPoE, DHCP, DNS, DDNS, UPnP, NTP,SMTP		
	Accss/Transfer Bandwidth	36/40Mbps	60/60Mbps	72/80Mbps
Mobile Device	OS	iOS, Andriod		
Storage	HDD	SATA × 1, up to 6TB	SATA × 1, up to 6TB	SATA × 1, up to 8TB
Backup	Local Backup	U disk, USB removable HDD		
	Network Backup	Yes		
Port	RS 485	RS 485 × 1, connect to PTZ or keyboard		
	USB	USB 2.0 × 2(in the rear panel)		
	Remote Controller	Optional		
Others	Power Supply	DC12V / 1.5A	DC12V / 2A	DC12V / 3A
	Consumption	≤5W(without HDD)	≤8W(without HDD)	≤10W(without HDD)
	Dimensions(mm)	255mm × 233mm × 42 mm(W × D × H)		
	Work Environment	-10~50°C, 10%~90% (humidity)		

Dimensions

QTH94-B

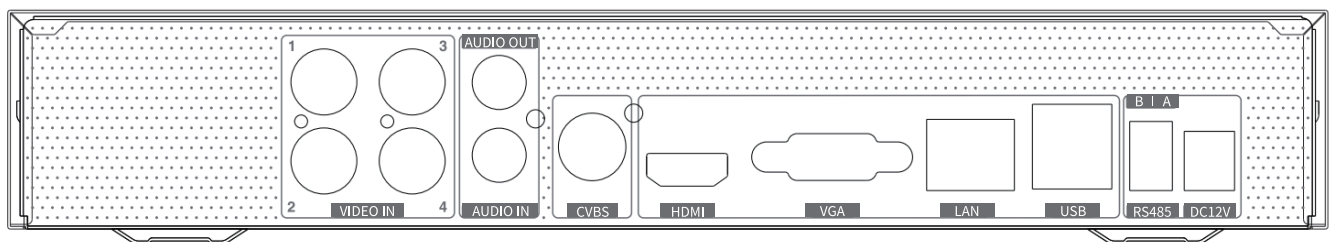

QTH98-B

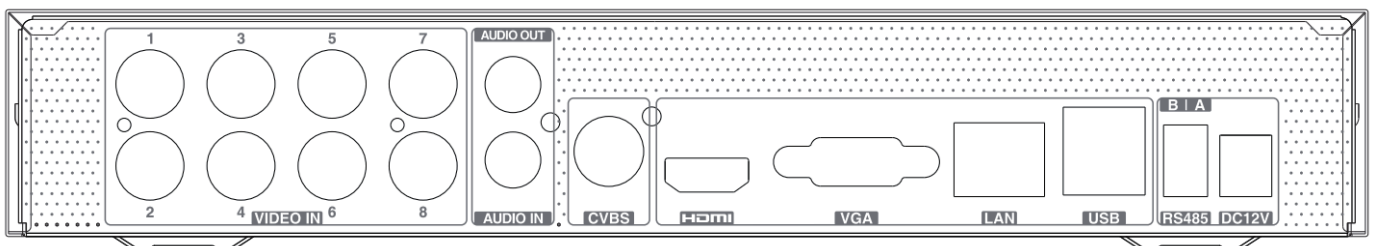

QTH916-B

