

Product Features



- ▲ Support 4/8 CH 8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF IP video input
- ▲ Adopt standard H.265 and H.264 high profile compression format to get high-quality video at much lower bit rate
- ▲ Intuitive and user-friendly Graphic User Interface (GUI),Windows style operation by mouse
- ▲ Multi-mode recording: manual / timer / motion / sensor
- ▲ Playback : 4 / 8 CH simultaneous playback
- ▲ Search : time slice, time, event, tag, smart search
- ▲ Support multiple VCA (Video Content Analytics) events, such as object abandoned/missing, region intrusion, tripwire, video tampering, etc.
- ▲ Support POS information overlay on live view and playback
- ▲ Express and flexible backup via USB, network and so on
- ▲ Pentaplex : preview, record, playback, backup and remote access
- ▲ DHCP, DDNS, PPPoE network protocol
- ▲ Remote control via IE or CMS : preview, playback,backup, PTZ and configuration
- ▲ Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- ▲ Multi-user online simultaneously
- ▲ Authorization management, log view and device status view
- ▲ 4K output, true high resolution display
- ▲ Support NAT function and QRCode scanning by mobile phones
- ▲ Powerful mobile surveillance by smart phones with iOS and Android OS

SPECIFICATION

MODEL		QT874-D	QT878-D
System		Embedded Linux	
Video	Network Input	4 CH IPC input	8 CH IPC input
	Compression	Standard H.265 / H.264	
	Network Input Resolution	8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF	
	Output	HDMI × 1 : 3840 × 2160 / 1920 × 1080 / 1280 × 1024/ 1024 × 768 VGA × 1 : 1920×1080/1280×1024/1024×768	
Audio	Network Input	4 CH IPC audio input	8 CH IPC audio input
	2-way Audio	RCA × 1	
	Local Output	RCA × 1	
	Compression	G.711(U/A)	
Record	Record Stream	Dual stream recording	
	Resolution	8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF	
	Frame Rate	NTSC:30fps; PAL:25fps	
Playback	Simultaneous Playback	Max 4 CH	Max 8 CH
	Search	Time slice / time / event / tag search	
	Smart Search	Highlight colors to display the camera record in a certain period of time, different colors refer to different record events	
	Function	Play, pause, FF, FB, digital zoom, etc.	


Alarm	Mode	Manual, sensor, motion, exception	
	Input	Supports IPC alarm input	
	Output	Supports IPC alarm output	
	Triggering	Record, snap, preset, e-mail, etc.	
Network	Interface	RJ 45 × 1 (10/100/1000Mbps)	
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP, HTTP, HTTPS, 802.1x	
	Incoming/ Outgoing Bandwidth	40/40 (Mbps)	80/80 (Mbps)
Mobile Device	OS	iOS, Andriod	
Storage	HDD Interface	SATA3.0 × 1, max 8T	
Backup	Local Backup	U disk, USB mobile HDD	
	Network Backup	Yes	
Port	USB	USB 2.0 × 2	
	Remote Controller	Optional	
PoE	PoE Ports	100M RJ45 × 4	100M RJ45 × 8
	Standards	IEEE802.3af	
	Output Power	Unlimited	≤ 96W
Decoding Capability	Live View/ Playback	1CH 8MP 4CH 1080P	
Others	Power Supply	DC 48V/1.25A	DC 48V/2.5A
	Consumption	≤ 10W (without HDD)	
	Dimensions(mm)	300 × 249 × 45(W × D × H)	
	Work Environment	-10 ~ 50 ℃ , 10% ~ 90% humidity	

Dimensions

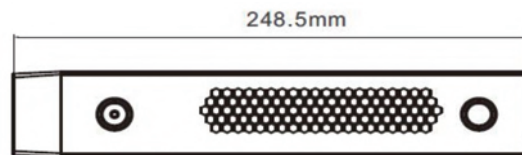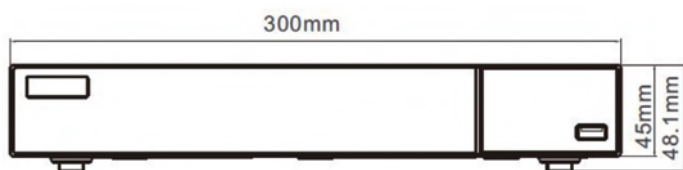

Rear Panels

QT874-D

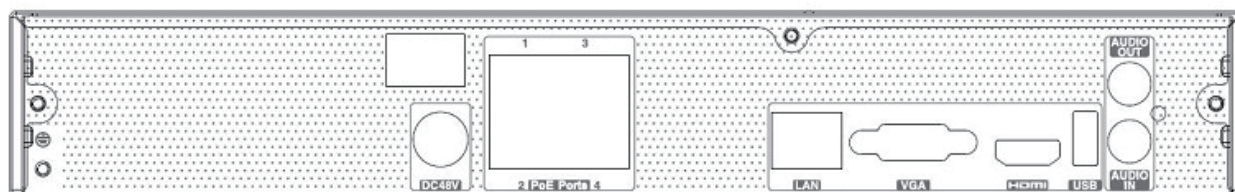

QT878-D

