


## Product Features



### QVN3132-4

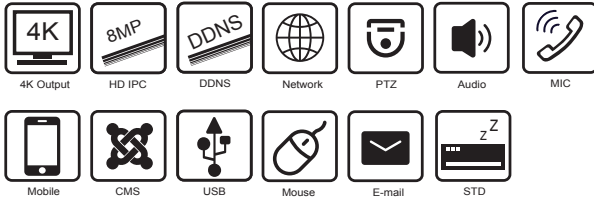


- ▲ Support 32 CH 8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P IP input
- ▲ Adopt standard H.265 and H.264 high profile compression format to get high-quality video at much lower bit rate
- ▲ Intuitive and user-friendly Graphic User Interface ( GUI ), Windows style operation by mouse
- ▲ Multi-mode recording: manual / timer / motion / sensor
- ▲ Playback : 16 CH simultaneous playback
- ▲ Search : time slice, time, event ( manual, sensor, motion ), tag search
- ▲ Express and flexible backup via USB, network and so on
- ▲ Pentaplex : preview, record, playback, backup and remote access
- ▲ DHCP, DDNS, PPPoE network protocol and CMS supported
- ▲ Remote control via IE or CMS : preview, playback, backup, PTZ and configuration
- ▲ Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- ▲ Multi-user online simultaneously
- ▲ Authorization management, log view and device status view
- ▲ 4K output, true high resolution display
- ▲ Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- ▲ Support NAT function and QRCode scanning by mobile phone and PAD
- ▲ Powerful smart phone & Pad surveillance with iOS and Andriod OS

## SPECIFICATION

System	Compression	Standard H.265, H.264
	OS	Embedded Linux
Video	Network Input	32 CH IPC input
	Network Access Bandwidth	112 Mbps
	Network Access Format	8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P@25 / 30fps
	Output	HDMI × 1 : 3840 × 2160 / 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA × 1 : 1920 × 1080 / 1280 × 1024 / 1024 × 768
Audio	Network Input	32 CH IPC audio input
	2-way Audio	RCA × 1
	Local Output	RCA × 1
Record	Record Stream	Dual stream recording
	Resolution	8MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P@25 / 30fps
	Mode	Manual, timer, motion, sensor
Playback	Simultaneous Playback	Max 16 CH
	Search	Time slice / time / event / tag search
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
	Function	Play, pause, FF, FB, digital zoom, etc.

Alarm	Mode	Manual, sensor, motion, exception, smart events
	Input	4 CH local alarm input 32 CH IPC alarm input
	Output	1 CH
	Triggering	Record, snap, preset, e-mail, etc.
Network	Interface	RJ45 10 / 100 / 1000 Mbps × 1
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP
Mobile Device	OS	iOS, Andriod
Storage	HDD	SATA × 4, up to 8TB per HDD
Backup	Local Backup	U disk, USB mobile HDD
	Network Backup	Yes
Port	USB	USB 2.0 × 2 ( one in the front panel and the other in the rear panel )
	Remote Controller	Optional
	RS485	RS485 × 2, connect to PTZ or keyboard
Others	Power Supply	ATX
	Consumption	≤ 15W ( without HDD )
	Dimensions (mm)	440 × 390 × 70 ( W × D × H )
	Work Environment	-10 ~ 50 ℃ , 10% ~ 90% humidity

### Dimensions

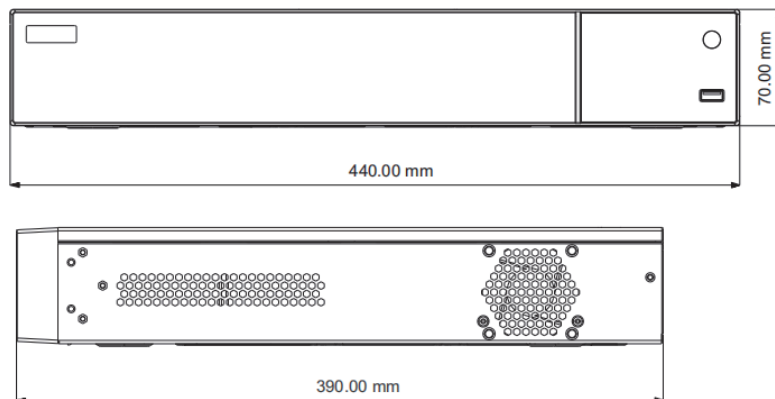

### Rear Panel

